
F202 series

Pull Down Extension Faucet

5 in 1 / 6 in 1 Operation Manual



PARTS

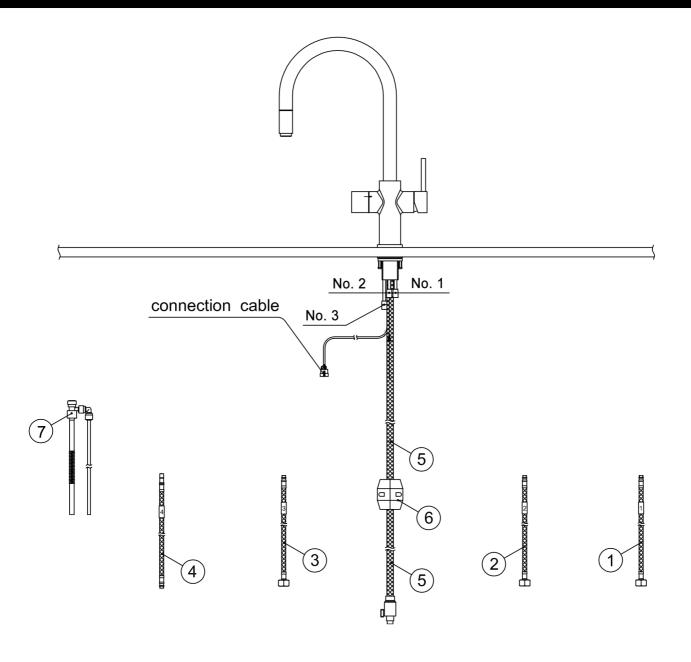

Item	Drawing No.
1	Blue stripe woven stainless steel pipe
2	Red stripe woven stainless pipe
3	Woven stainless steel pipe
4	Woven steel pipe
5	Pull down extension hose
6	Gravity ball
7	Three way valve set

1. Please find the area on the surface that is at least 50 mm away from the edge and drill a hole between Ø32 mm to Ø35 mm for faucet installation. ≥ 50mm ϕ 32mm $\sim \phi$ 35mm drilling size

3. Insert the threaded housing through the drilled opening including all pipes and the cable. drilling size ϕ 32mm \sim ϕ 35mm


4. Follow the sequence as shown in the image below. Install slicone shim, metal shim, and C type nut, then tighten the screws.


Silicone shim

Metal shim

C type nut

Screw

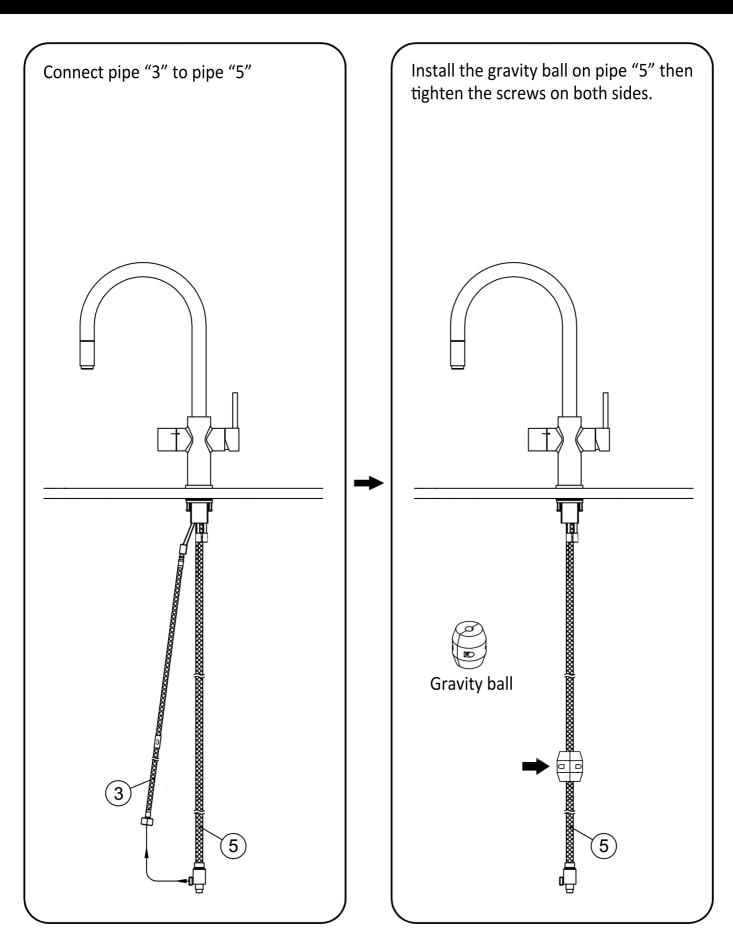


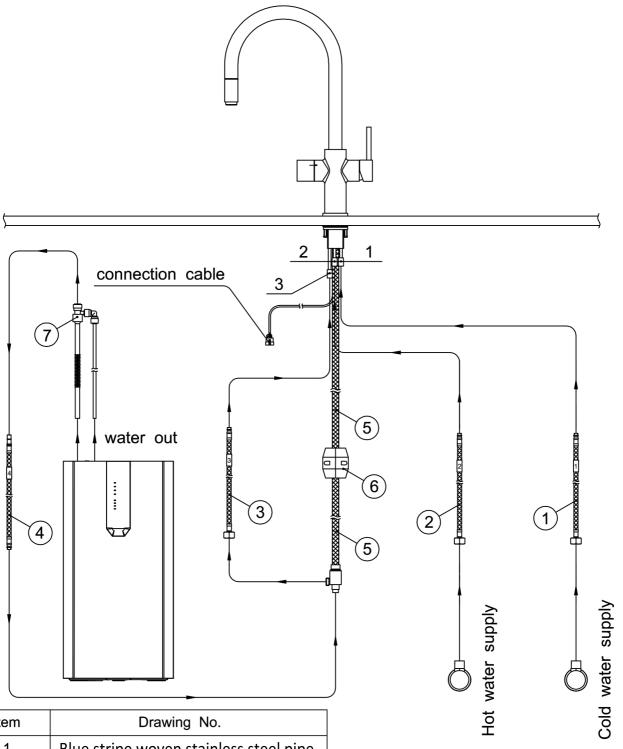


Item	Drawing No.
1	Blue stripe woven stainless steel pipe
2	Red stripe woven stainless steel pipe
3	Woven stainless steel pipe
4	Woven stainless steel pipe
5	Pull down extension hose
6	Gravity ball
7	Three way valve set

After the faucet is mounted on table, please connect pipe "3" to pipe "5", the extension pulling hose, and then connect pipe "4" to water dispenser outlet as shown in the drawing below.


1. There are two marking on the faucet lever for cold and hot water. Blue is for ambient water and red is hot water.

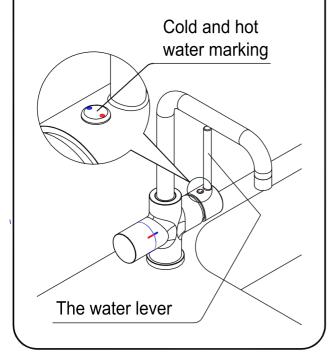

2. Hold the lever and turn up or down as directed by the arrow to choose hot or ambient water.

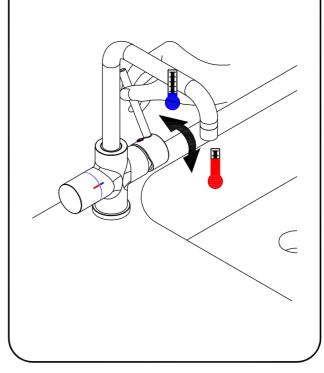

3. Pull the lever to the right as shown by the arrow for the water to flow out.

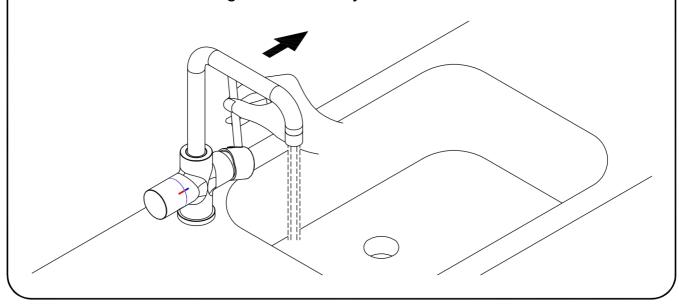

There are three or four functions on the rotate controller and the icon of turning off the water.



Hot water icon



Stop dispensing icon



Cold water icon



Stop dispensing icon




Sparkling water icon




Ambient water icon


Align the stop dispensing icon on both rotate controller on the faucet body to stop dispensing; the blue LED light will be on.

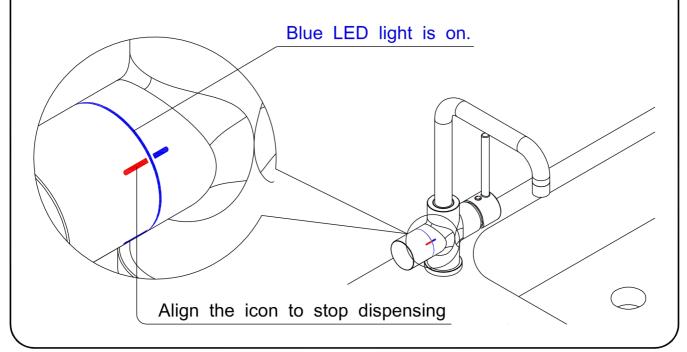

LED LIGHT INDICATION

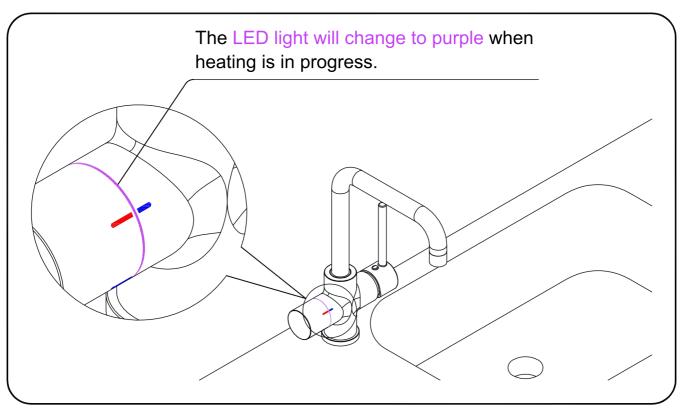



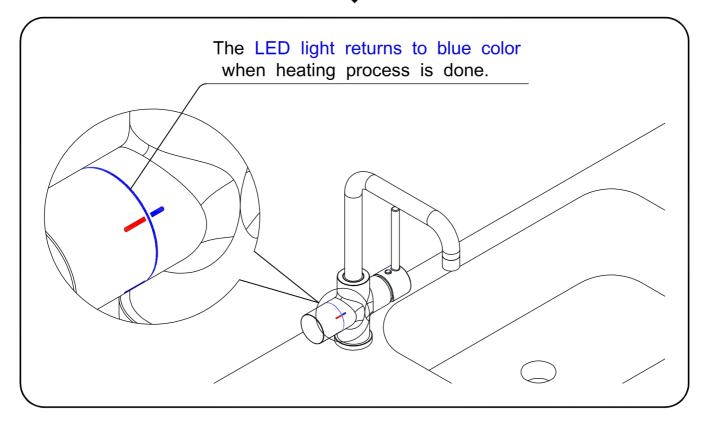

LED LIGHT INDICATION

